


capwap-discovery_ipv6_primed.pcapng

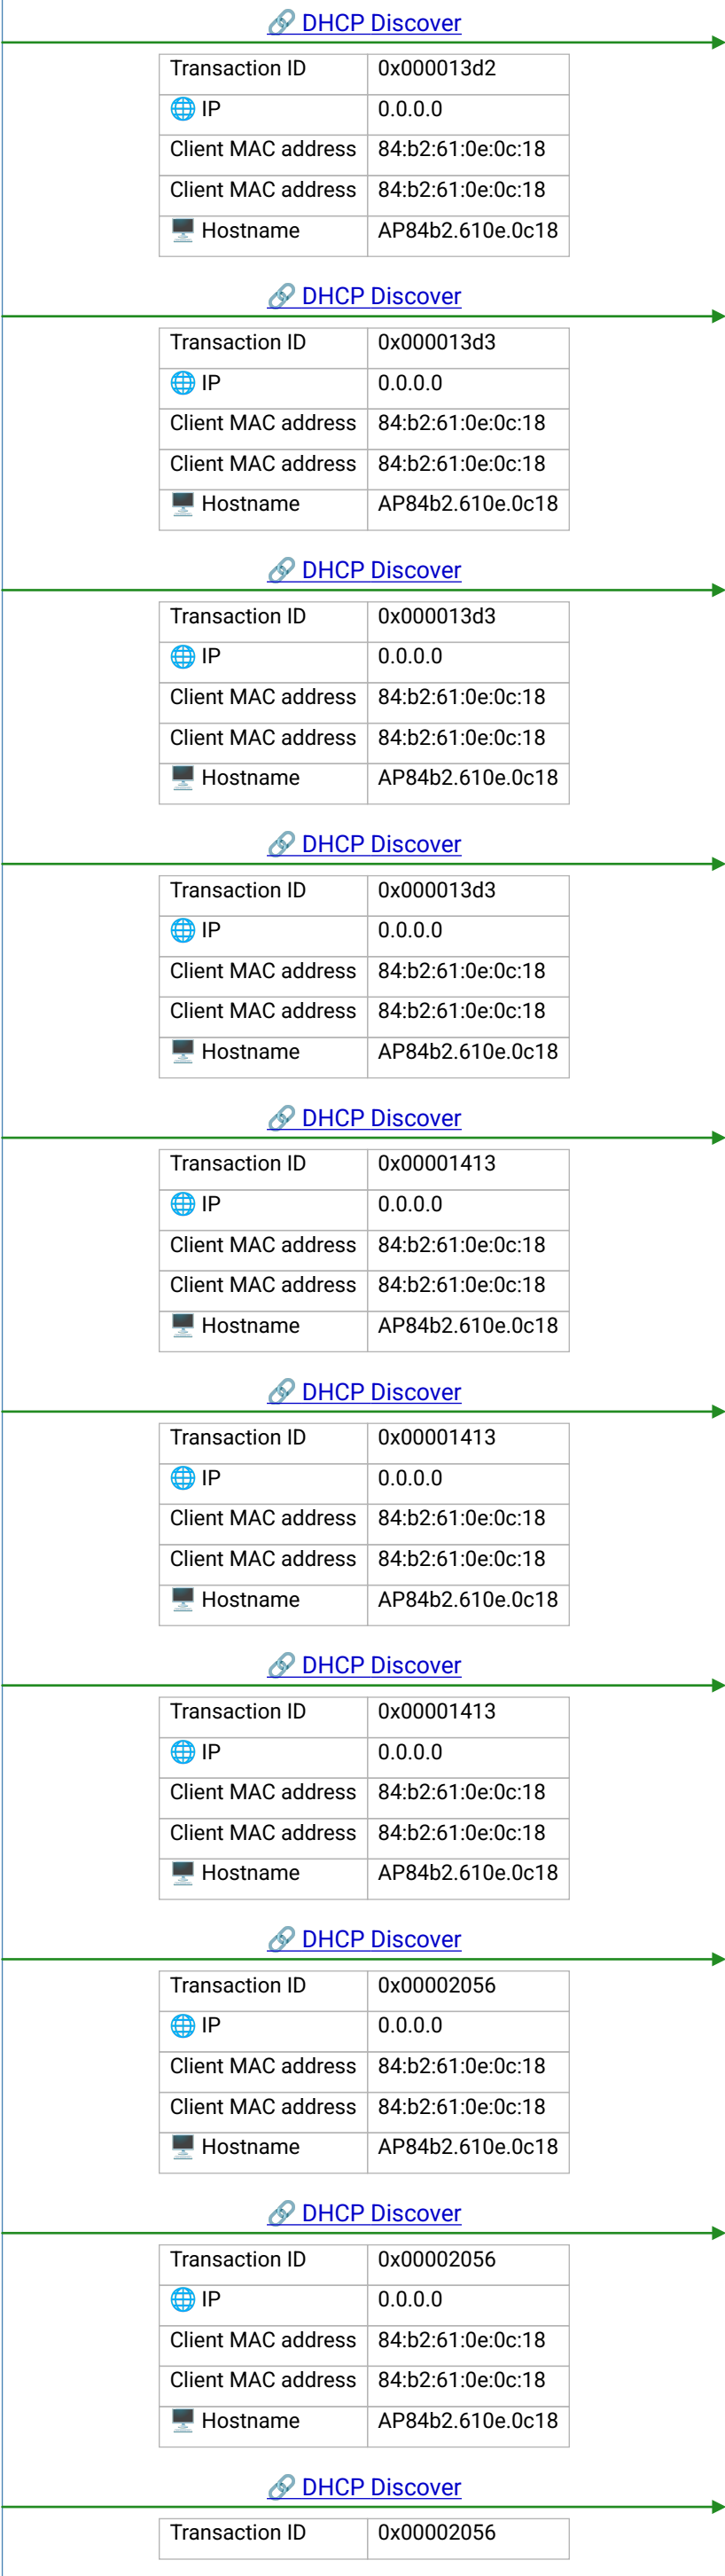

💡 DHCP – client obtains IP address after 802.11 association and EAPOL key exchange complete; DORA: Discover→Offer→Request→ACK; in WLAN, DHCP may traverse CAPWAP tunnel to WLC

💡 DHCP – client obtains IP address after 802.11 association and EAPOL key exchange complete; DORA: Discover→Offer→Request→ACK; in WLAN, DHCP may traverse CAPWAP tunnel to WLC

💡 DHCP – client obtains IP address after 802.11 association and EAPOL key exchange complete; DORA: Discover→Offer→Request→ACK; in WLAN, DHCP may traverse CAPWAP tunnel to WLC

💡 DHCP – client obtains IP address after 802.11 association and EAPOL key exchange complete; DORA: Discover→Offer→Request→ACK; in WLAN, DHCP may traverse CAPWAP tunnel to WLC

💡 DHCP – client obtains IP address after 802.11 association and EAPOL key exchange complete; DORA: Discover→Offer→Request→ACK; in WLAN, DHCP may traverse CAPWAP tunnel to WLC

💡 DHCP – client obtains IP address after 802.11 association and EAPOL key exchange complete; DORA: Discover→Offer→Request→ACK; in WLAN, DHCP may traverse CAPWAP tunnel to WLC

💡 DHCP – client obtains IP address after 802.11 association and EAPOL key exchange complete; DORA: Discover→Offer→Request→ACK; in WLAN, DHCP may traverse CAPWAP tunnel to WLC



💡 DHCP – client obtains IP address after 802.11 association and EAPOL key exchange complete; DORA: Discover→Offer→Request→ACK; in WLAN, DHCP may traverse CAPWAP tunnel to WLC

💡 DHCP – client obtains IP address after 802.11 association and EAPOL key exchange complete; DORA: Discover→Offer→Request→ACK; in WLAN, DHCP may traverse CAPWAP tunnel to WLC

💡 DHCP – client obtains IP address after 802.11 association and EAPOL key exchange

No IP

Broadcast

 IP	0.0.0.0
Client MAC address	84:b2:61:0e:0c:18
Client MAC address	84:b2:61:0e:0c:18
 Hostname	AP84b2.610e.0c18

complete; DORA:
Discover→Offer→Request→ACK;
in WLAN, DHCP may traverse
CAPWAP tunnel to WLC